


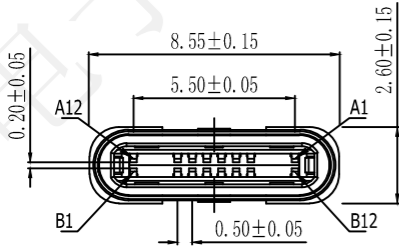
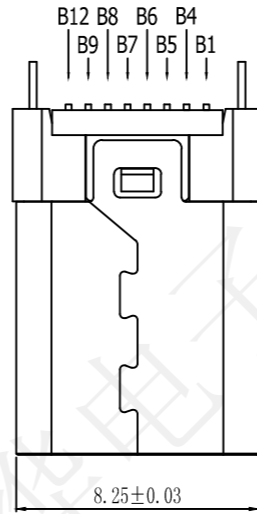
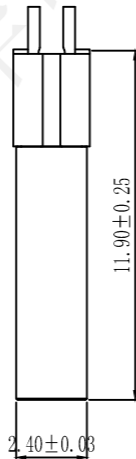


| | | | | | |
|------|---------|-------------|------|-------|------|
| REV. | ECN NO. | DESCRIPTION | DRAW | APPD. | DATE |
| A | --- | | | | |

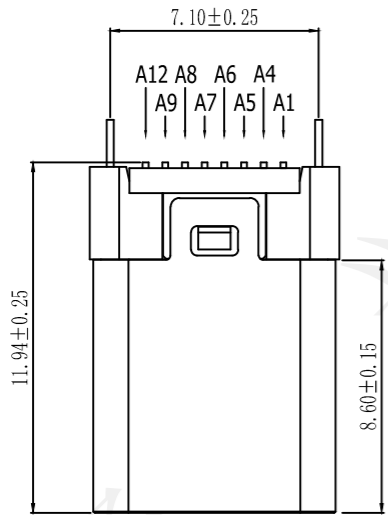

NOTES:
 1. MECHANICAL:
 MATING FORCE: 5-20N .
 UNMATING FORCE: 8-20N .
 DURABILITY: 10000 CYCLES MIN.
 2. ELECTRICAL:
 CURRENT: 5.0A MAX
 VOLTAGE: 20V MAX
 WITHSTANDING VOLTAGE: 100V AC
 CONTACT RESISTANCE: 40 mΩ MAX INITIAL;
 50 mΩ MAX AFTER 10000 CYCLES
 3. ENVIRONMENTAL
 OPERATING TEMPERATURE RANGE -30°C ~ +80°C



受控文件

| | |
|----------------------|----|
| A4、A9、B9、B4 | V |
| A5 | |
| B5 | |
| A1、A12、B1、B12 | G |
| A6 | D+ |
| A7 | D- |
| (R1=56KΩ R3=56KΩ) 5% | |

| NO. | DESCRIPTION | QTY. | MATERIAL | TREATMENT |
|-----|-------------|------|------------------------|---|
| ④ | GND LATCH | 1 | STAINLESS STEEL | NICKEL PLATED OVERALL, TAB WITH LEAD FREE TIN ALLOY. |
| ③ | CONTACT | 16 | COPPER ALLOY | NICKEL UNDERPLATING OVER ALL, GOLD PLATING AT - CONTACT AREA. LEAD FREE TIN ALLOY AT TERMINATION. |
| ② | SHELL | 1 | STAINLESS STEEL | CLEAN. |
| ① | HOUSING | 2 | THERMOPLASTIC UL 94V-0 | MOLDED COLOR:BLACK. white |

深圳市兴烨电子有限公司
Shenzhen XingYe Electronics co., Ltd

| | | |
|-----------|-------|------------|
| TOLERANCE | | |
| X.X | ±0.30 | x.° ±2° |
| .XX | ±0.20 | .X° ±1° |
| .XXX | ±0.10 | .XX° ±0.5° |
| UNITS | mm | |

APPD: 陈爱光
 CHED: 施立敏
 DRAW: 马洪飞

| | | |
|----------------|---------------------|------|
| Series Name : | | |
| Product Name : | TYPE-CF-16P立贴公头H1.9 | |
| Part NO: | UCZ27498 | |
| SCALE | SHEET | REV. |
| 1:1 | 1/1 | A1 |