



REV.	ECN NO.	DESCRIPTION	DRAW	APPD.	DATE
A	---				



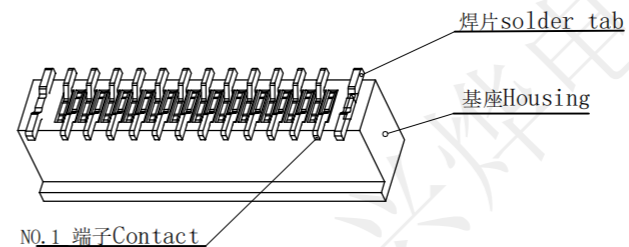


QXIS	料号	尺寸		
		A	B	C
4P	FCL24508	1.50	2.60	4.90
5P	FCL24509	2.00	3.10	5.40
6P	FCL24510	2.50	3.60	5.90
7P	FCL24511	3.00	4.10	6.40
8P	FCL24512	3.50	4.60	6.90
9P	FCL24513	4.00	5.10	7.40
10P	FCL24514	4.50	5.60	7.90
11P	FCL24515	5.00	6.10	8.40
12P	FCL24516	5.50	6.60	8.90
13P	FCL24517	6.00	7.10	9.40
14P	FCL24518	6.50	7.60	9.90
15P	FCL24519	7.00	8.10	10.40
16P	FCL24520	7.50	8.60	10.90
17P	FCL24521	8.00	9.10	11.40
18P	FCL24522	8.50	9.60	11.90
19P	FCL24523	9.00	10.10	12.40
20P	FCL24524	9.50	10.60	12.90
21P	FCL24525	10.00	11.10	13.40
22P	FCL24526	10.50	11.60	13.90
23P	FCL24527	11.00	12.10	14.40
24P	FCL24528	11.50	12.60	14.90
25P	FCL24529	12.00	13.10	15.40
26P	FCL24530	12.50	13.60	15.90
27P	FCL24531	13.00	14.10	16.40
28P	FCL24532	13.50	14.60	16.90
29P	FCL24533	14.00	15.10	17.40
30P	FCL24534	14.50	15.60	17.90
31P	FCL24535	15.00	16.10	18.40
32P	FCL24536	15.50	16.60	18.90
33P	FCL24537	16.00	17.10	19.40
34P	FCL24538	16.50	17.60	19.90
35P	FCL24539	17.00	18.10	20.40
36P	FCL24540	17.50	18.60	20.90
37P	FCL24541	18.00	19.10	21.40
38P	FCL24542	18.50	19.60	21.90
39P	FCL24543	19.00	20.10	22.40
40P	FCL24544	19.50	20.60	22.90
41P	FCL24545	20.00	21.10	23.40
42P	FCL24546	20.50	21.60	23.90
43P	FCL24547	21.00	22.10	24.40
44P	FCL24548	21.50	22.60	24.90
45P	FCL24549	22.00	23.10	25.40
46P	FCL24550	22.50	23.60	25.90
47P	FCL24551	23.00	24.10	26.40
48P	FCL24552	23.50	24.60	26.90
49P	FCL24553	24.00	25.10	27.40
50P	FCL24554	24.50	25.60	27.90
51P	FCL24555	25.00	26.10	28.40
52P	FCL24556	25.50	26.60	28.90
53P	FCL24557	26.00	27.10	29.40
54P	FCL24558	26.50	27.60	29.90
55P	FCL24559	27.00	28.10	30.40
56P	FCL24560	27.50	28.60	30.90
57P	FCL24561	28.00	29.10	31.40
58P	FCL24562	28.50	29.60	31.90
59P	FCL24563	29.00	30.10	32.40
60P	FCL24564	29.50	30.60	32.90


技术参数 SPECIFICATIONS
 间距 (Pitch): 0.5
 极数 (Poles): 4~60
 额定电压 (Voltage rating): 50V DC/AC
 额定电流 (Current rating): 0.5A DC/AC
 耐压值 (Withstand Voltage): 500V
 工作温度 (Working Temperature): -25°C ~ +85°C

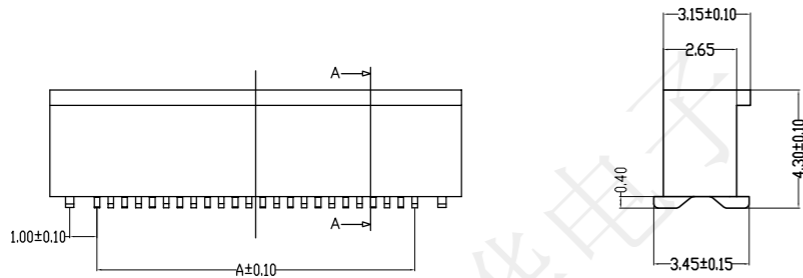


绝缘电阻 (Insulation Resistance): $\geq 500M\Omega$
 接触电阻 (Contact resistance): $\leq 30m\Omega$
 单面接触 (Single contact)
 材料 Material
 接触件 (Contact): 磷青铜 t=0.2mm 镀亮锡 (底层Ni 30~80 u", 表层Sn 80~200 u")
 焊片 (solder tab): 黄铜 t=0.3mm 镀亮锡 (底层Ni 30~80 u", 表层Sn 80~200 u")
 塑胶主体 (Housing): LCP 耐热树脂 (UL94V-0) LCP Heat resistance plastic (UL94V-0) 白色White

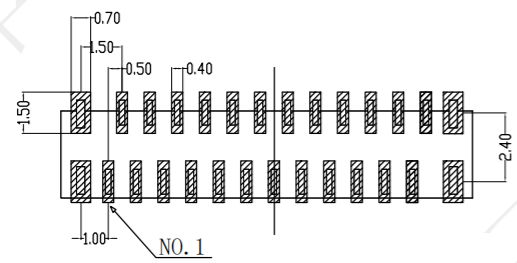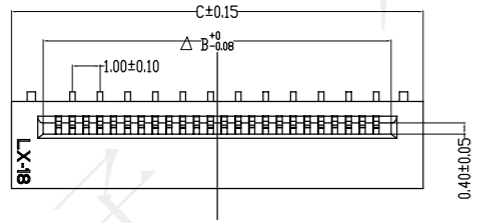

PCB LAYOUT

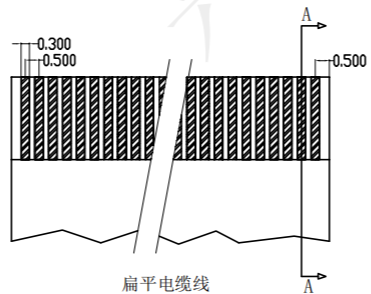

扁平电缆线



受控文件

深圳市兴烨电子有限公司 ShenZhen XingYe Electronics co., Ltd		Series Name : 0.5-2-nP无锁正脚立贴	
TOLERANCE		Product Description :	
.XX ±0.30	X.° ±2°	Part NO:	
.XX ±0.20	.X° ±1°		
.XXX ±0.10	.XX° ±0.5°		
UNITS	mm	DRAW: 马洪飞	
		SCALE SHEET REV. 1:1 1/1 A1	