
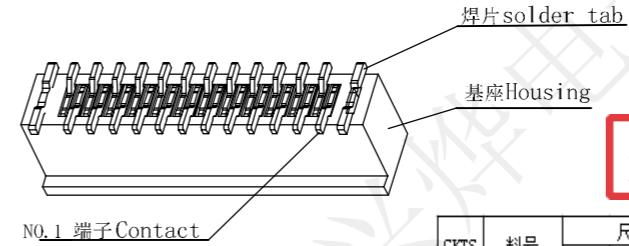







REV.	ECN NO.	DESCRIPTION	DRAW	APPD.	DATE
A	---				

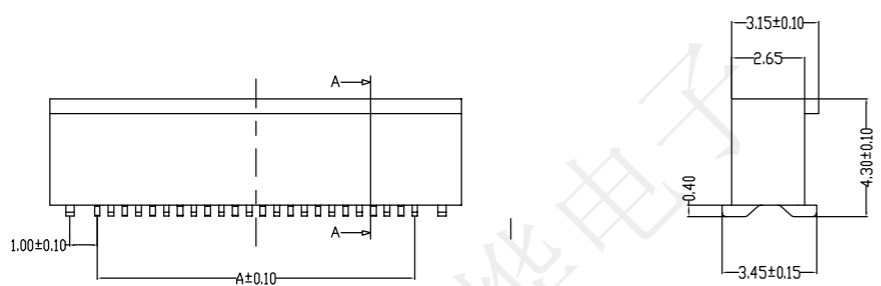

受控文件

CKTS	料号	尺寸			CKTS	料号	尺寸		
		A	B	C			A	B	C
4P	FCL23982	1.5	2.6	4.9	33P	FCL24011	16.0	17.1	19.4
5P	FCL23983	2.0	3.1	5.4	34P	FCL24012	16.5	17.6	19.9
6P	FCL23984	2.5	3.6	5.9	35P	FCL24013	17.0	18.1	20.4
7P	FCL23985	3.0	4.1	6.4	36P	FCL24014	17.5	18.6	20.9
8P	FCL23986	3.5	4.6	6.9	37P	FCL24015	18.0	19.1	21.4
9P	FCL23987	4.0	5.1	7.4	38P	FCL24016	18.5	19.6	21.9
10P	FCL23988	4.5	5.6	7.9	39P	FCL24017	19.0	20.1	22.4
11P	FCL23989	5.0	6.1	8.4	40P	FCL24018	19.5	20.6	22.9
12P	FCL23990	5.5	6.6	8.9	41P	FCL24019	20.0	21.1	23.4
13P	FCL23991	6.0	7.1	9.4	42P	FCL24020	20.5	21.6	23.9
14P	FCL23992	6.5	7.6	9.9	43P	FCL24021	21.0	22.1	24.4
15P	FCL23993	7.0	8.1	10.4	44P	FCL24022	21.5	22.6	24.9
16P	FCL23994	7.5	8.6	10.9	45P	FCL24023	22.0	23.1	25.4
17P	FCL23995	8.0	9.1	11.4	46P	FCL24024	22.5	23.6	25.9
18P	FCL23996	8.5	9.6	11.9	47P	FCL24025	23.0	24.1	26.4
19P	FCL23997	9.0	10.1	12.4	48P	FCL24026	23.5	24.6	26.9
20P	FCL23998	9.5	10.6	12.9	49P	FCL24027	24.0	25.1	27.4
21P	FCL23999	10.0	11.1	13.4	50P	FCL24028	24.5	25.6	27.9
22P	FCL24000	10.5	11.6	13.9	51P	FCL24029	25.0	26.1	28.4
23P	FCL24001	11.0	12.1	14.4	52P	FCL24030	25.5	26.6	28.9
24P	FCL24002	11.5	12.6	14.9	53P	FCL24031	26.0	27.1	29.4
25P	FCL24003	12.0	13.1	15.4	54P	FCL24032	26.5	27.6	29.9
26P	FCL24004	12.5	13.6	15.9	55P	FCL24033	27.0	28.1	30.4
27P	FCL24005	13.0	14.1	16.4	56P	FCL24034	27.5	28.6	30.9
28P	FCL24006	13.5	14.6	16.9	57P	FCL24035	28.0	29.1	31.4
29P	FCL24007	14.0	15.1	17.4	58P	FCL24036	28.5	29.6	31.9
30P	FCL24008	14.5	15.6	17.9	59P	FCL24037	29.0	30.1	32.4
31P	FCL24009	15.0	16.1	18.4	60P	FCL24038	29.5	30.6	32.9
32P	FCL24010	15.5	16.6	18.9					

技术参数 SPECIFICATIONS
 间距 (Pitch) : 0.5
 极数 (Poles) : 4~60
 额定电压 (Voltage rating) : 50V DC/AC
 额定电流 (Current rating) : 0.5A DC/AC
 耐压值 (Withstand Voltage) : 500V
 工作温度 (Working Temperature) : -25°C ~ +85°C
 绝缘电阻 (Insulation Resistance) : $\geq 500M\Omega$
 接触电阻 (Contact resistance) : $\leq 30m\Omega$
 单面接触 (Single contact)

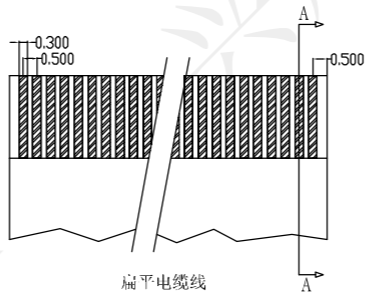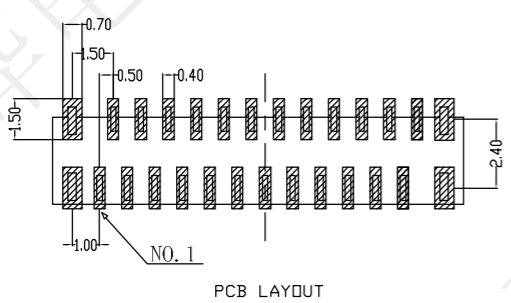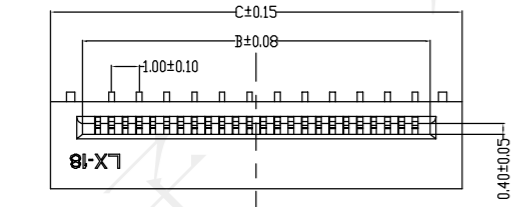

材料 Material
 接触件 (Contact) : 磷青铜 t=0.2mm 镀亮锡 (底层Ni 30~80 u", 表层Sn 80~200 u")
 焊片 (solder tab) : 黄铜 t=0.3mm 镀亮锡 (底层Ni 30~80 u", 表层Sn 80~200 u")
 塑胶主体 (Housing) : LCP-M401 耐热树脂 (UL94V-0) Heat resistance plastic (UL94V-0) 白色 White

TOLERANCE		Series Name : 0.5-nP单面接立贴		
		Product Name :		
.XX ±0.30	X.° ±2°	Part NO:		
.XX ±0.20	.X° ±1°	SCALE SHEET REV.		
.XXX ±0.10	.XX° ±0.5°	1:1	1/1	A1
UNITS	mm	DRAW: 马洪飞		

APPD: 陈爱光
CHED: 施立敏
DRAW: 马洪飞