








REV.	ECN NO.	DESCRIPTION	DRAW	APPD.	DATE
A	---				



RECOMMENDED P.C.B. LAYOUT

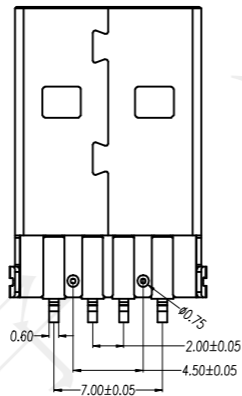

**受控文件**

Specification:  
 Current rating: DC 1.5A 30V  
 Dielectric withstanding voltage: 500 V(ac) for 1 min.  
 Contact resistance: 30 mΩ Max.  
 Insulation resistance: 100 MΩ Min.  
 Total mating force: 3.57 Kgf Max.  
 Total unmating force: 1.02 Kgf Min.  
 Temperature range: -30°C~80°C

3	Shell	1PCS	iron alloy	t=0.3mm
2	Contacts	4PCS	copper alloy	t=0.25mm
1	Housing	1PCS	LCP	black/UL94v-0
No.	Pare Name	Number	Material	Remarks

		Series Name :		
		Product Description : A公180度沉板黑胶带柱铁		
TOLERANCE		Part NO: USBG48048		
X.X ±0.30	X.° ±2°	APPD: 陈爱光		
.XX ±0.20	.X° ±1°	CHED: 施立敏		
.XXX ±0.10	.XX° ±0.5°	DRAW: 马洪飞	SCALE	SHEET
UNITS	mm		1:1	1/1
			REV.	A1