

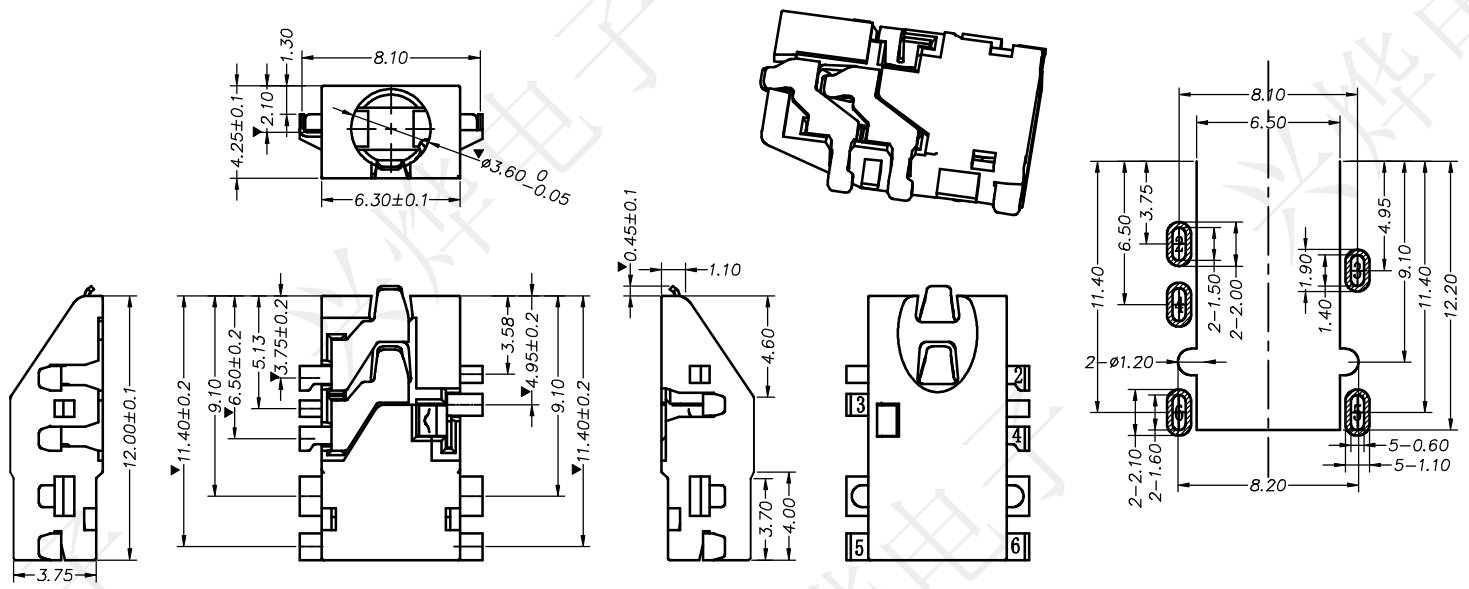
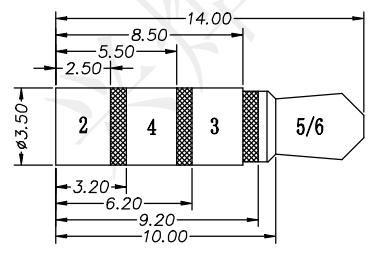


REV.	ECN NO.	DESCRIPTION	DRAW	APPD.	DATE
A	---				



P. C. B LAYOUT TOP VIEW



SPECIFICATION:
 Operating temperature: -40°C~55°C
 Rated loading: DC 30V 0.5A
 Contact resistance: 30mΩ Max
 Insulation resistance: 100MΩ Min
 Withstanding voltage: AC 500V (50Hz) /min
 Insertion force: 3-20N
 Pullout force: 3-20N
 Life: 5000 CYCLES

受控文件

5	左脚	1	磷铜	镀金
4	右脚	1	磷铜	镀金
3	弹片脚	1	磷铜	镀金
2	1#脚	2	磷铜	镀金
1	基座	1	PPA	黑色
序号	部件名称	数量	材质	备注

深圳市兴烨电子有限公司
 ShenZhen XingYe Electronics co., Ltd

TOLERANCE		APPD: 陈爱光
X.X ±0.30	X.* ± 2*	CHED: 施立敏
.XX ±0.20	.X* ± 1*	
.XXX ±0.10	.XX* ±0.5*	DRAW: 马洪飞
UNITS	mm	

Series Name :			
Product Description :	PJ-3241-5P		
Part No:	PJL11012		
	SCALE	SHEET	REV.
	1:1	1/1	A1