


REV.	ECN NO.	DESCRIPTION	DRAW	APPD.	DATE
A	---				

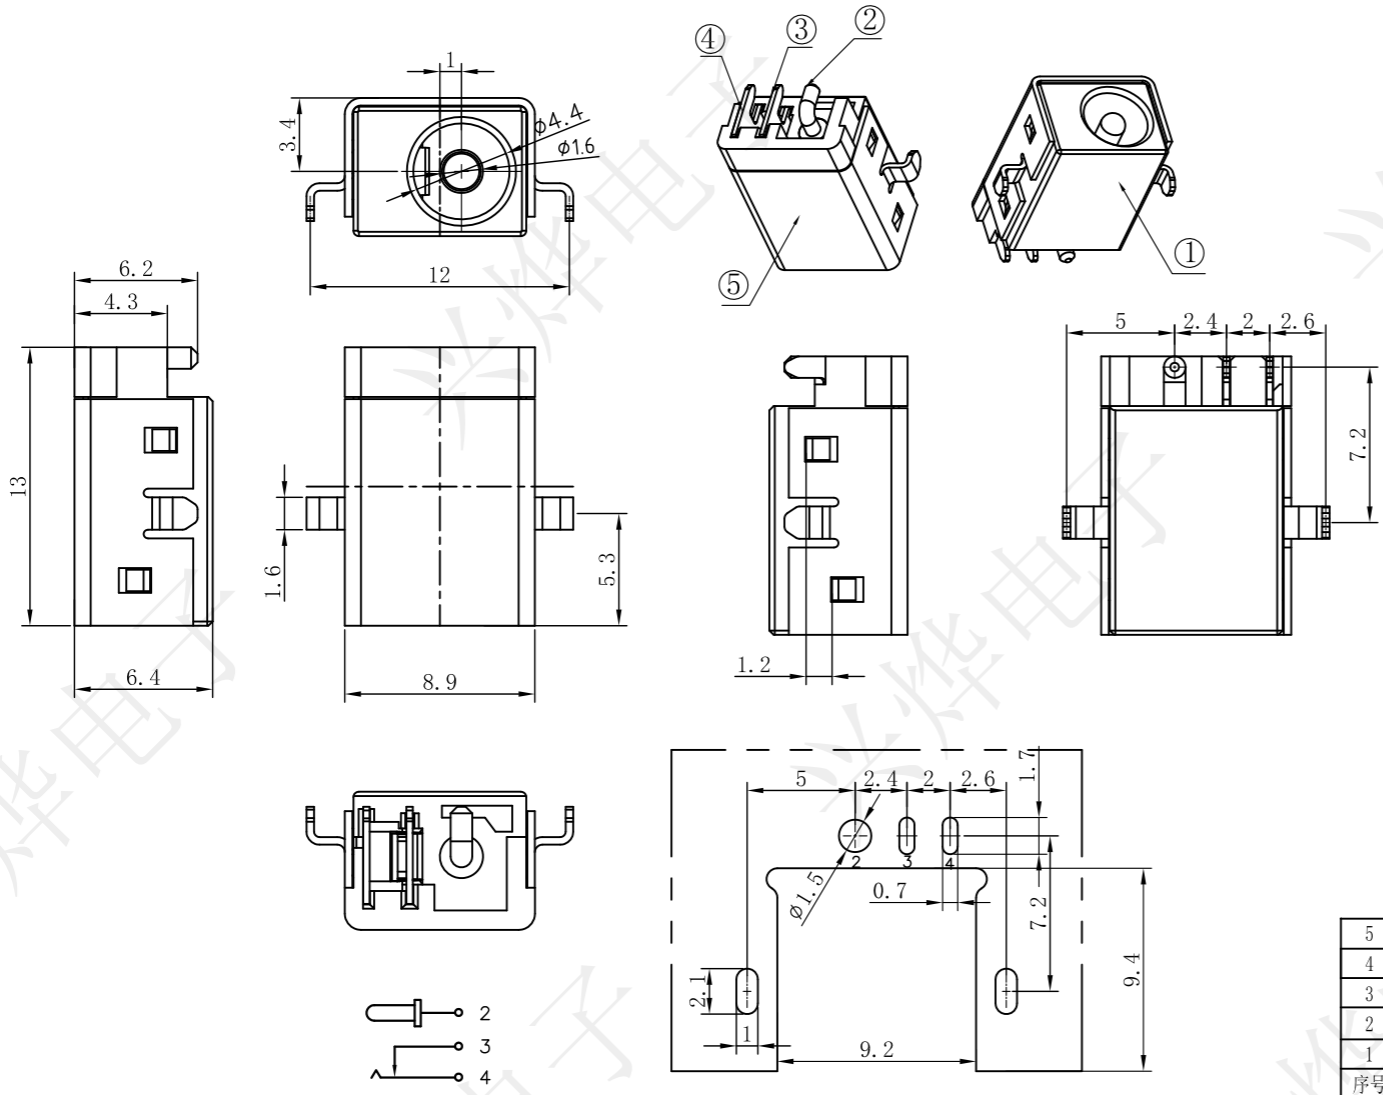

受控文件

**SPECIFICATION:**  
 Operating temperature: -30°C~70°C  
 Rated loading: DC 30V 0.5A  
 Contact resistance: 30mΩ Max  
 Insulation resistance: 100MΩ Min  
 Withstanding voltage: AC 500V (50Hz) /min  
 Insertion force: 3-20N  
 Pullout force: 3-20N  
 Life: 5000 CYCLES

5	外壳	1	SPCC	0.4T	镀锌
4	弹片	1	磷铜	0.30T	镀银
3	插片	1	黄铜	0.30T	镀银
2	圆针	1	黄铜		镀银
1	底座	1	PPA(黑色)		
序号	产品名称	数量	材料	规格	电镀

<b>深圳市兴烨电子有限公司</b> ShenZhen XingYe Electronics co., Ltd		Series Name :					
		Product Name : DC-023D 针1.6					
TOLERANCE X.X ±0.30 X.* ± 2* .XX ±0.20 .X.* ± 1* .XXX ±0.10 .XX.* ±0.5* UNITS mm		Part NO: DCL19032					
		APPD: 陈爱光 CHED: 施立敏 DRAW: 马洪飞	<table border="1"> <tr> <td>SCALE</td> <td>SHEET</td> <td>REV.</td> </tr> <tr> <td>1:1</td> <td>1/1</td> <td>A1</td> </tr> </table>	SCALE	SHEET	REV.	1:1
SCALE	SHEET	REV.					
1:1	1/1	A1					