

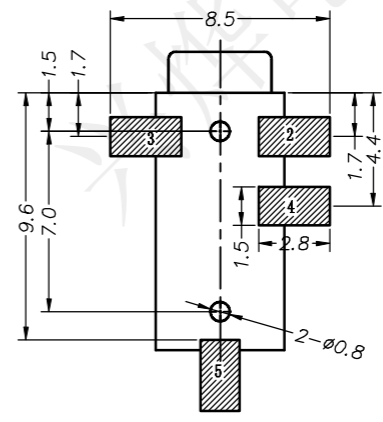
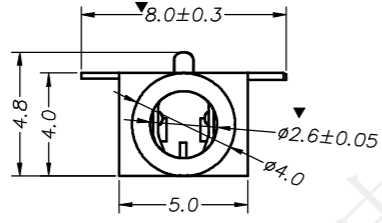





REV.	ECN NO.	DESCRIPTION	DRAW	APPD.	DATE
A	---				



P. C. B LAYOUT TOP VIEW

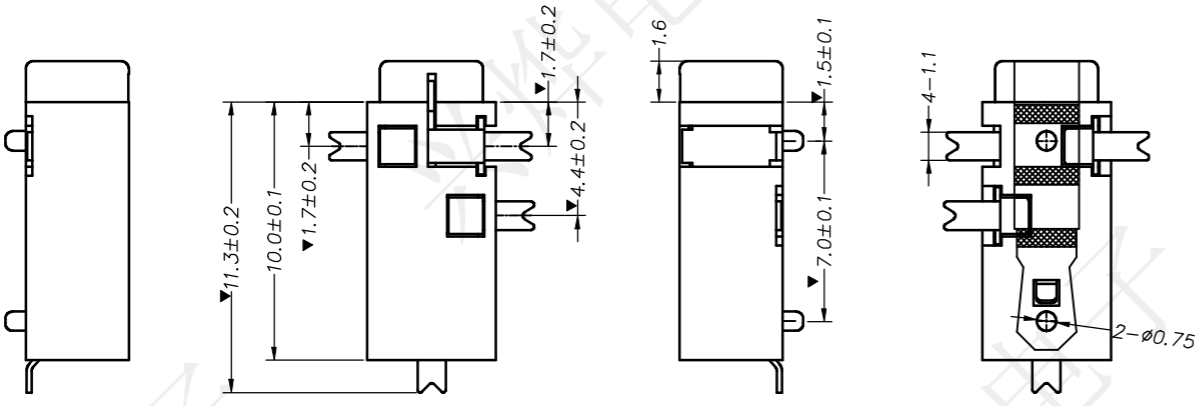

- CONTACT CURRENT RATING: 0.5A.
- CONTACT RESISTANCE: 30 mΩ MAX.;
- INSULATION RESISTANCE: 100MΩ MIN.;
- DIELECTRIC WITHSTANDING: 500V AC MIN.;
- DURABILITY: 5,000 CYCLES MIN.;
- CONNECTOR MATING FORCES: 20N MAX.;
- CONNECTOR UNMATING FORCES: 3N MIN.;
- Operating temperature: -30° C~70° C

受控文件



5	1#脚	1	磷铜	0.25T	镀银
4	2#脚	1	磷铜	0.25T	镀银
3	盖脚	1	磷铜	0.35T	镀银
2	2#脚	1	磷铜	0.25T	镀银
1	底座	1	PPA(黑色)		
序号	产品名称	数量	材料	规格	电镀

深圳市兴烨电子有限公司
ShenZhen XingYe Electronics co., Ltd

TOLERANCE		
X.X ±0.30	X.° ±2°	APPD: 陈爱光
.XX ±0.20	.X° ±1°	CHED: 施立敏
.XXX ±0.10	.XX° ±0.5°	DRAW: 马洪飞
UNITS	mm	

Series Name :		
Product Name :	PJ-218贴片编带	
Part NO:	PJL21025	
SCALE	SHEET	REV.
1:1	1/1	A1