

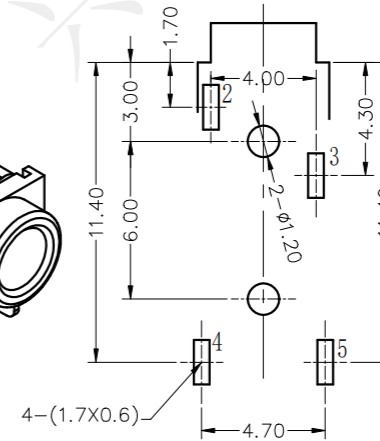

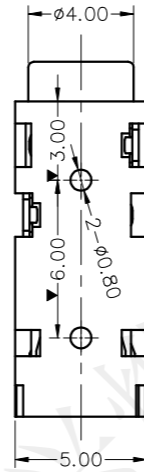
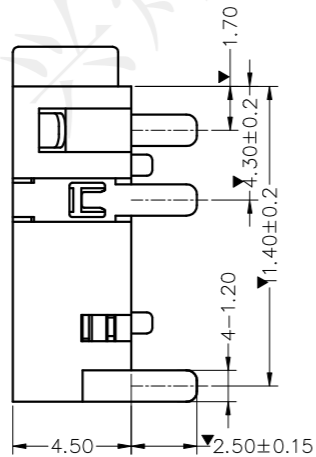


REV.	ECN NO.	DESCRIPTION	DRAW	APPD.	DATE
A	---				



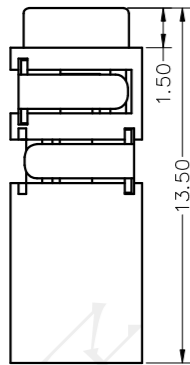


受控文件

1. CONTACT CURRENT RATING: 0.2A.
2. CONTACT RESISTANCE: 30 mΩ MAX.;
3. INSULATION RESISTANCE: 100MΩ MIN.;
4. DIELECTRIC WITHSTANDING: 250 V AC MIN.;
5. DURABILITY: 5,000 CYCLES MIN.;
6. CONNECTOR MATING FORCES: 30N MAX.;
7. CONNECTOR UNMATING FORCES: 3~10N;



P. C. B LAYOUT TOP VIEW



4	插片	1	黄铜	0.25T	镀银
3	大弹片	1	磷铜	0.25T	镀银
2	小弹片	2	磷铜	0.25T	镀银
1	基座	1	PPA		黑色
序号	名称	数量	材料		镀涂

深圳市兴烨电子有限公司
ShenZhen XingYe Electronics co., Ltd

Series Name :		
Product Name : PJ-208B 2.5卧式四脚插		
Part NO: PJL11028		
	SCALE 1:1	SHEET 1/1
	REV. A1	

TOLERANCE		
X.X ±0.30	X.° ±2°	APPD: 陈爱光
XX ±0.20	.X° ±1°	CHED: 施立敏
XXX ±0.10	.XX° ±0.5°	DRAW: 马洪飞
UNITS	mm	