

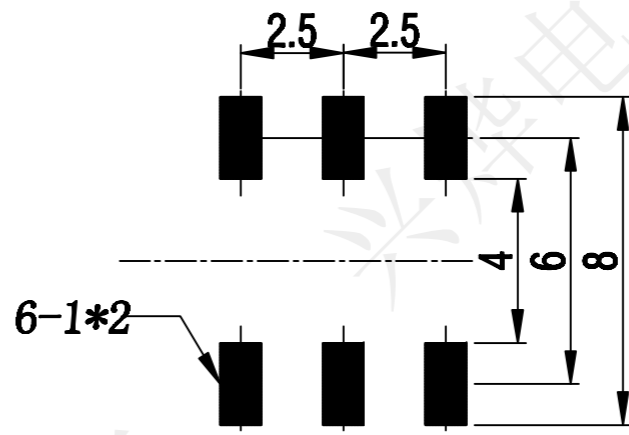
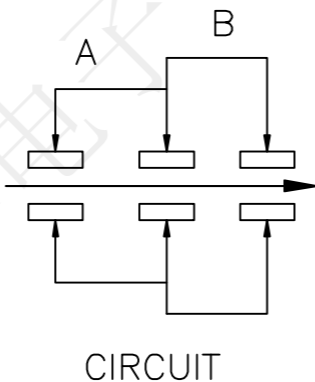
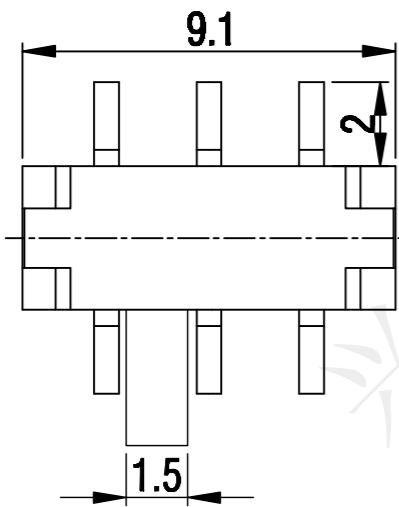


REV.	ECN NO.	DESCRIPTION	DRAW	APPD	DATE

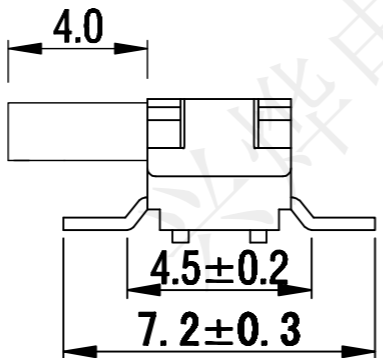

P.C.B LAYOUT DIMENSION
TOP VIEW

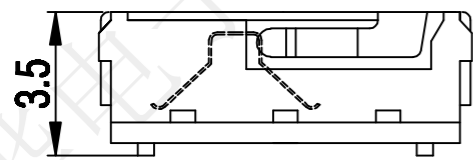

受控文件

SPECIFICATION:
 Operating temperature:-16 °C~60 °C
 Rated loading:DC 50V 0.5A
 Contact resistance:80mΩ Max
 Insulation resistance:100MΩ Min
 Withstanding voltage:AC 500V (50-60Hz) /min
 Operation Force:200gf±50gf
 Electrical Life:10000 cycles



5	CONTACT	C5210	2	Ag
4	TERMINAL a,b&c	C2680	6	Ag
3	BOTTOM	PA46	1	BLACK
2	COVER	SUS	1	NATURAL
1	STEM	PA46	1	BLACK
NO.	PARTS	MATERIAL	QTY.	FINISHING

		Series Name :
深圳市兴烨电子有限公司 ShenZhen Xing Ye Electronics co., Ltd		Product Name :
TOLERANCE X.X ±0.30 X° ±2° .XX ±0.20 .X° ±1° .XXX ±0.10 .XX° ±0.5°		MSK-22D18A-4H六脚卧式贴片
UNITS mm		Part NO: SKL10002
APPD: 陈爱光 CHED: 施立敏 DRAW: 马洪飞		SCALE SHEET REV. 1:1 1/1 A1