

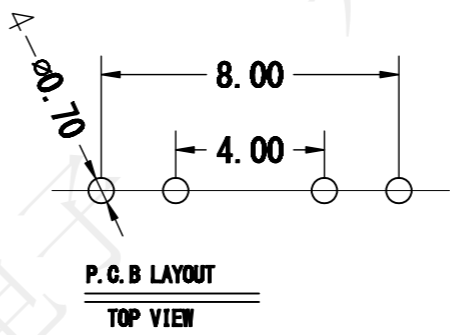
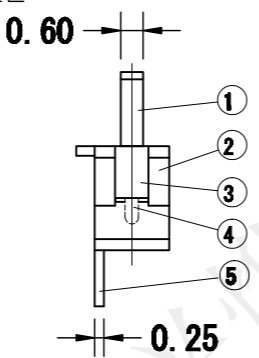
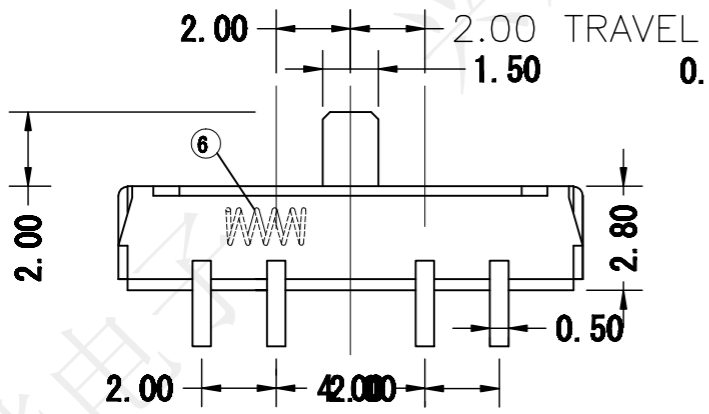


REV.	ECN NO.	DESCRIPTION	DRAW	APPD	DATE
	---				

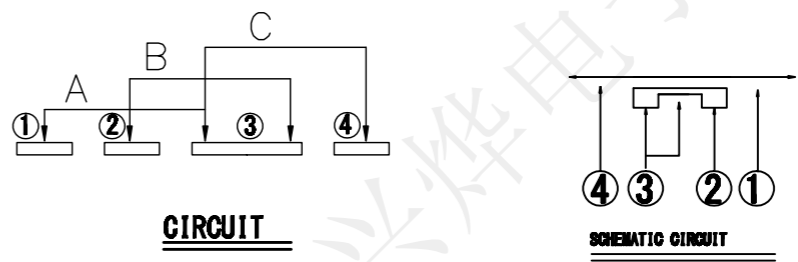

**SPECIFICATION:**  
 Operating temperature: -20 °C ~ 85 °C  
 Rated loading: DC 12V 0.1A  
 Contact resistance: 80mΩ Max  
 Insulation resistance: 100MΩ Min  
 Withstanding voltage: AC 500V (50-60Hz) /min  
 Operation Force: 200gf+50gf  
 Electrical Life: 10,000 cycles

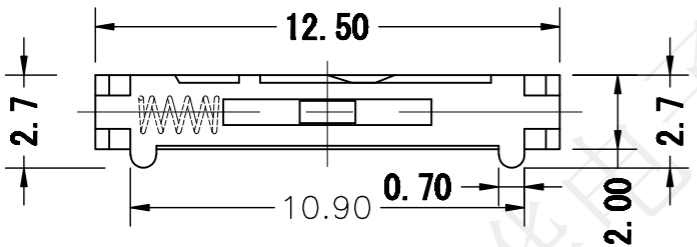

**受控文件**

6	SPRING	SUS	1	NATURAL
5	TERMINALS	C2680	4	Ag
4	CONTACT	C5210	1	Ag
3	COVER	SUS	1	NATURAL
2	BOTTOM	PA46	1	BROWN
1	STEM	PA46	1	BLACK
NO.	NAME	MATERIAL	QTY:	FINISHING

**深圳市兴烨电子有限公司**  
 Shenzhen Xing Ye Electronics co., Ltd

TOLERANCE  
 X.X ±0.30 X° ±2°  
 .XX ±0.20 .X° ±1°  
 .XXX ±0.10 .XX° ±0.5°  
 UNITS mm

APPD: 陈爱光  
 CHED: 施立敏  
 DRAW: 马洪飞

Series Name :		
Product Name : MSK-12D19A H2.0偏四左复位		
Part NO: SKL10008		
SCALE	SHEET	REV.
1:1	1/1	A1