


REV.	ECN NO.	DESCRIPTION	DRAW	APPD	DATE
A	---				

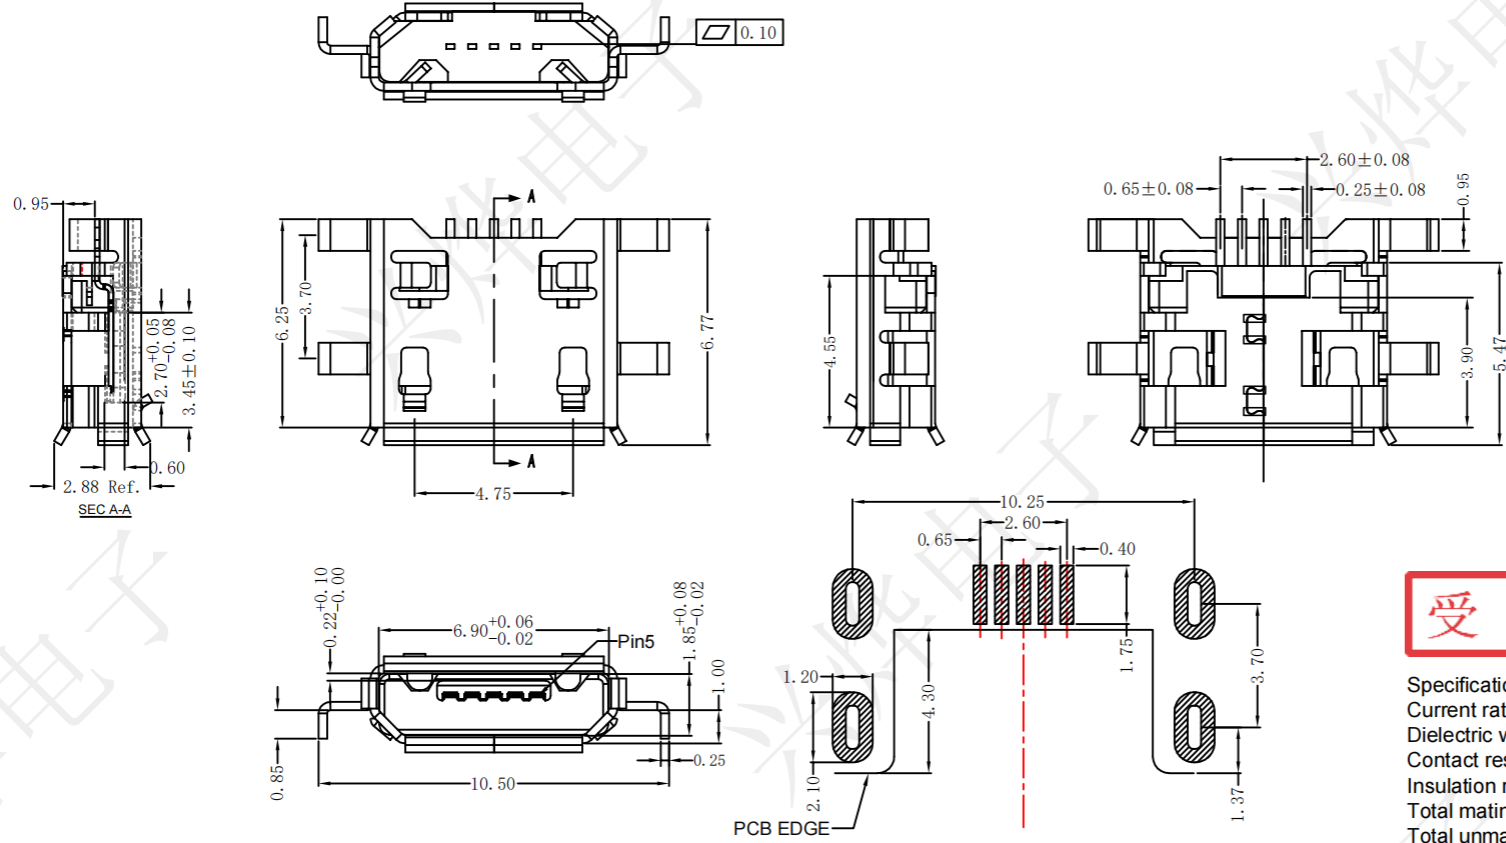

受控文件

Specification:  
 Current rating: 1.5PIN 1.8A Max/2,3,4PIN 1A Max.  
 Dielectric withstanding voltage: 100 V(ac) for 1 min.  
 Contact resistance: 30 mΩ Max.  
 Insulation resistance: 100 MΩ Min.  
 Total mating force: 3.57 Kgf Max.  
 Total unmating force: 1.0 Kgf Min.  
 Temperature range: -30°C~80°C

RECOMMENDED PCB LAYOUT  
 PCB图仅供参考



MKF26097	MICRO-5P沉板1.0四脚插卷边铜雾锡编带
MKF26098	MICRO-5P沉板1.0四脚插卷边铜镀镍编带
MKF26099	MICRO-5P沉板1.0四脚插卷边不锈钢雾锡编带
MKF26100	MICRO-5P沉板1.0四脚插卷边不锈钢镀镍编带

**深圳市兴烨电子有限公司**  
 Shenzhen XingYe Electronics co., Ltd

Series Name :  
 MICRO-5P沉板1.0四脚插卷边编带

3	Shell	1PCS	copper alloy/SUS304	t=0.25mm
2	Contacts	5PCS	copper alloy	t=0.20mm
1	Housing	1PCS	LCP	UL94v-0
No.	Pare Name	Number	Material	Remarks

TOLERANCE			
.XX	±0.30	.X°	±2°
.XX	±0.20	.X°	±1°
.XXX	±0.10	.XX°	±0.5°
UNITS	mm		

Product Description :		
Part NO:		
SCALE	SHEET	REV.
1:1	1/1	A1

APPD: 陈爱光  
 CHED: 施立敏  
 DRAW: 马洪飞

