
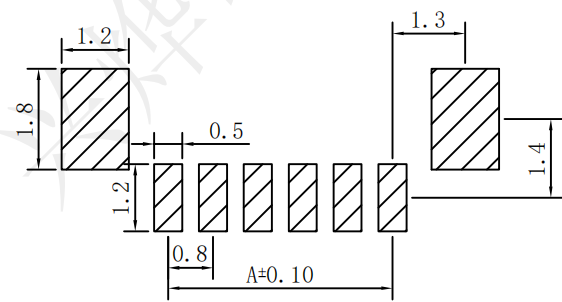
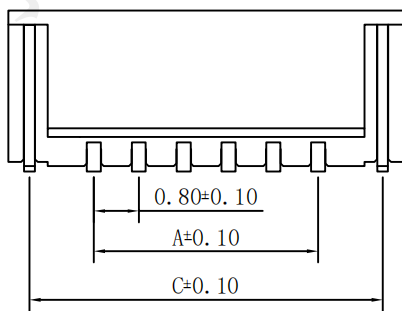



REV.	ECN NO.	DESCRIPTION	DRAW	APPD.	DATE
A	---				

**SPECIFICATIONS**

- 1、Current Rating: 0.5A AC, DC
- 2、Voltage Rating: 30V AC, DC
- 3、Temperatuer Range: -25℃~+85℃
- 4、Contact Resistance: 20mΩ Max
- 5、Insulation Resistance: 100MΩ Min
- 6、Withstanding Voltang: 500V AC/minute
- 7、Material: LCP UL94V-0  
PIN brass Tin-plated  
Solder tad brass Tin-plated

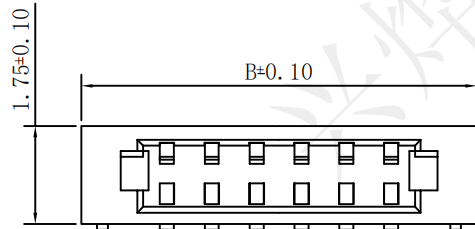

PIN数	料号	尺寸		
		A	B	C
2P	TZL24178	0.80	3.85	3.10
3P	TZL24179	1.60	4.65	3.90
4P	TZL24180	2.40	5.45	4.70
5P	TZL24181	3.20	6.25	5.50
6P	TZL24182	4.00	7.05	6.30
7P	TZL24183	4.80	7.85	7.10
8P	TZL24184	5.60	8.65	7.90
9P	TZL24185	6.40	9.45	8.70
10P	TZL24186	7.20	10.25	9.50
11P	TZL24187	8.00	11.05	10.30
12P	TZL24188	8.80	11.85	13.25
13P	TZL24189	9.60	12.65	11.10
14P	TZL24190	10.40	13.45	11.90
15P	TZL24191	11.20	14.25	12.70
16P	TZL24192	12.00	15.05	13.50
17P	TZL24193	12.80	15.85	14.30
18P	TZL24194	13.60	16.65	15.10
19P	TZL24195	14.40	17.45	15.90
20P	TZL24196	15.20	18.25	16.70



受控文件

**深圳市兴烨电子有限公司**  
ShenZhen XingYe Electronics co., Ltd

TOLERANCE		
X.X ±0.30	X.* ± 2*	APPD: 陈爱光
.XX ±0.20	.X* ± 1*	CHEd: 施立敏
.XXX ±0.10	.XX* ±0.5*	DRAW: 马洪飞
UNITS	mm	

Series Name : 0.8间距 卧式贴片系列  
Product Pescription :

Part NO:	SCALE	SHEET	REV.
	1:1	1/1	A1