
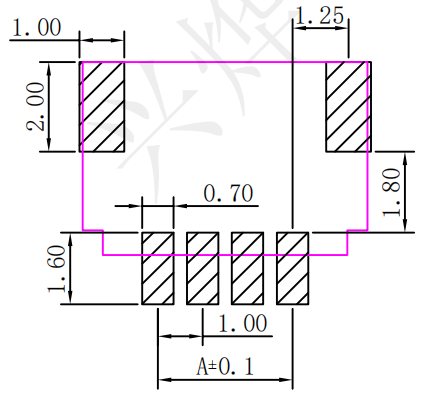
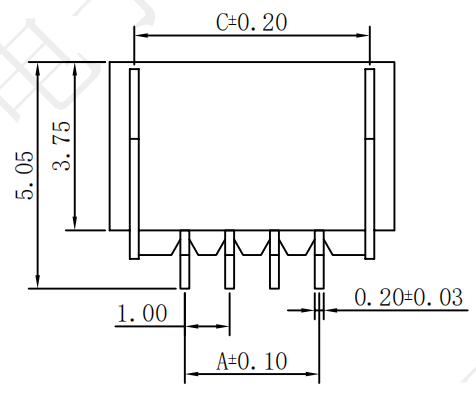




REV.	ECN NO.	DESCRIPTION	DRAW	APPD.	DATE
A	---				

SPECIFICATIONS

- 1、Current Rating: 0.5A AC, DC
- 2、Voltage Rating: 50V AC, DC
- 3、Temperatuer Range: -25℃~+85℃
- 4、Contact Resistance: 20mΩ Max
- 5、Insulation Resistance: 100MΩ Min
- 6、Withstanding Voltang: 500V AC/minute
- 7、Material: LCP UL94V-0
PIN brass Tin-plated
Solder tad brass Tin-plated



PCB LAYOUT



受控文件

PIN数	料号	尺寸		
		A	B	C
2P	TZL24144	1.0	4.35	3.25
3P	TZL24145	2.0	5.35	4.25
4P	TZL24146	3.0	6.35	5.25
5P	TZL24147	4.0	7.35	6.25
6P	TZL24148	5.0	8.35	7.25
7P	TZL24149	6.0	9.35	8.25
8P	TZL24150	7.0	10.35	9.25
9P	TZL24151	8.0	11.35	10.25
10P	TZL24152	9.0	12.35	11.25
11P	TZL24153	10.0	13.35	12.25
12P	TZL24154	11.0	14.35	13.25
13P	TZL24155	12.0	15.35	14.25
14P	TZL24156	13.0	16.35	15.25
15P	TZL24157	14.0	17.35	16.25
16P	TZL24158	15.0	18.35	17.25

深圳市兴烨电子有限公司
ShenZhen XingYe Electronics co., Ltd

Series Name : 1.0间距 卧式贴片系列
Product Pescription :

TOLERANCE		APPD: 陈爱光 CHED: 施立敏 DRAW: 马洪飞
X.X ±0.30	X.* ± 2*	
.XX ±0.20	.X* ± 1*	
.XXX ±0.10	.XX* ±0.5*	
UNITS	mm	

Part NO:		
SCALE	SHEET	REV.
1:1	1/1	A1