

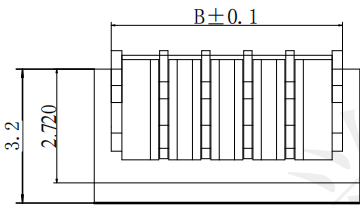
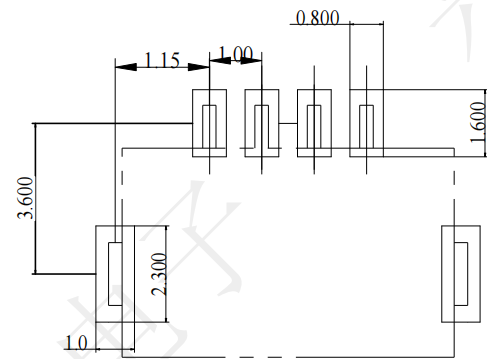
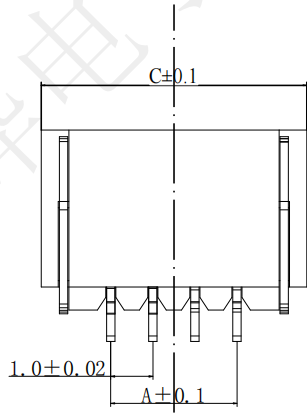


REV.	ECN NO.	DESCRIPTION	DRAW	APPD.	DATE
A	---				

SPECIFICATIONS

- 1、Current Rating: 0.5A AC, DC
- 2、Voltage Rating: 50V AC, DC
- 3、Temperature Range: -25℃~+85℃
- 4、Contact Resistance: 20mΩ Max
- 5、Insulation Resistance: 100MΩ Min
- 6、Withstanding Voltage: 500V AC/minute
- 7、Material: LCP UL94V-0
PIN brass Tin-plated
Solder tab brass Tin-plated



PIN数	料号	尺寸		
		A	B	C
2P	TZN24312	1.00	3.50	4.00
3P	TZN24313	2.00	4.50	5.00
4P	TZN24314	3.00	5.50	6.00
5P	TZN24315	4.00	6.50	7.00
6P	TZN24316	5.00	7.50	8.00
7P	TZN24317	6.00	8.50	9.00
8P	TZN24318	7.00	9.50	10.00
9P	TZN24319	8.00	10.50	11.00
10P	TZN24320	9.00	11.50	12.00
11P	TZN24321	10.00	12.50	13.00
12P	TZN24322	11.00	13.50	14.00
13P	TZN24323	12.00	14.50	15.00
14P	TZN24324	13.00	15.50	16.00
15P	TZN24325	14.00	16.50	17.00
16P	TZN24326	15.00	17.50	18.00
17P	TZN24327	16.00	18.50	19.00
18P	TZN24328	17.00	19.50	20.00
19P	TZN24329	18.00	20.50	21.00
20P	TZN24330	19.00	21.50	22.00



受控文件

深圳市兴烨电子有限公司
ShenZhen XingYe Electronics co., Ltd

Series Name :
1.0间距 卧式带扣系列

Product Description :

TOLERANCE		APPD: 陈爱光
X.X ±0.30	X.* ± 2'	CHED: 施立敏
.XX ±0.20	.X* ± 1'	
.XXX ±0.10	.XX* ±0.5'	DRAW: 马洪飞
UNITS	mm	

Part NO:

SCALE	SHEET	REV.
1:1	1/1	A1