

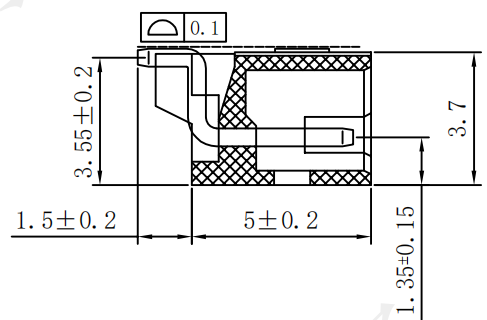
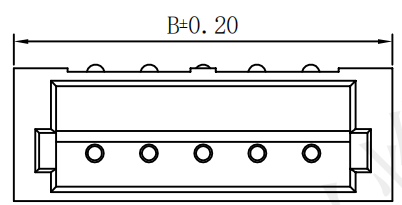


受控文件

REV.	ECN NO.	DESCRIPTION	DRAW	APPD.	DATE
A	---				

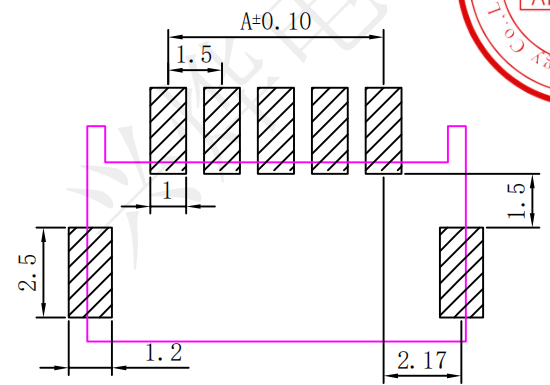

- SPECIFICATIONS**
- 1、 Current Rating: 1A AC, DC
 - 2、 Voltage Rating: 125V AC, DC
 - 3、 Temperatur Range: -25 °C~+85°C
 - 4、 Contact Resistance: 20mΩ Max
 - 5、 Insulation Resistance: 500MΩ Min
 - 6、 Withstanding Voltang: 500V AC/minute
 - 7、 Material: LPC UL94V-0
PIN brass Tin-plated
Solder tad brass Tin-plated

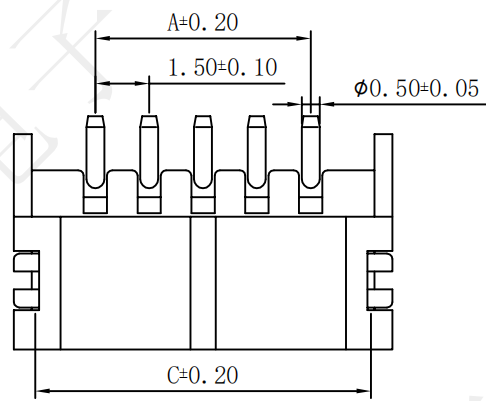

PCB LAYOUT



PIN数	料号	尺寸		
		A	B	C
2P	TZL24054	1.5	6.05	4.95
3P	TZL24055	3.0	7.55	6.45
4P	TZL24056	4.5	9.05	7.95
5P	TZL24057	6.0	10.55	9.45
6P	TZL24058	7.5	12.05	10.95
7P	TZL24059	9.0	13.55	12.45
8P	TZL24060	10.5	15.05	13.95
9P	TZL24061	12.0	16.55	15.45
10P	TZL24062	13.5	18.05	16.95
11P	TZL24063	15.0	19.55	18.45
12P	TZL24064	16.5	21.05	19.95
13P	TZL24065	18.0	22.55	21.45
14P	TZL24066	19.5	24.05	22.95
15P	TZL24067	21.0	25.55	24.45
16P	TZL24068	22.5	27.05	25.95

深圳市兴烨电子有限公司
ShenZhen XingYe Electronics co., Ltd

TOLERANCE		APPD: 陈爱光 CHED: 施立敏 DRAW: 马洪飞
X.X ±0.30	X.° ±2°	
.XX ±0.20	.X° ±1°	
.XXX ±0.10	.XX° ±0.5°	
UNITS	mm	

Series Name : 1.5间距 卧式贴片系列

Product Description :

Part NO:

SCALE	SHEET	REV.
1:1	1/1	A1